


## DATASHEET LED/24X24



Flexible LED light offers illuminated handrail system for lighted railing to provide symmetrically distributed lighting. Rail produces dot less dimmable light inside of double extruded profile with chamber without need of cooling as effective heat dissipation. Frameless and flexible solution for customers.

### CONNECTION

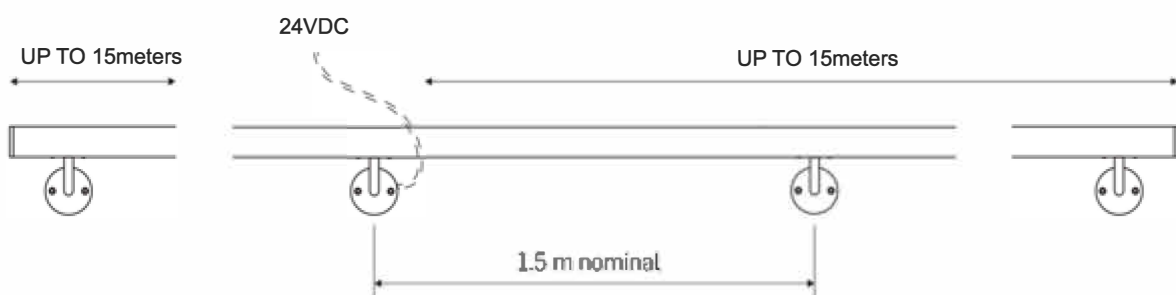

### KEY FEATURES



## TECHNICAL DATA

<b>Dimension:</b>	24x24mm	<b>Protection:</b>	IK08
<b>Spool length:</b>	25m	<b>Material:</b>	UV resistant soft silicone
<b>Cutting section:</b>	each 10cm	<b>Beam angle:</b>	100 degree
<b>LEDs:</b>	120led/m	<b>IP:</b>	IP40/*IP65 using silicone end
<b>Power consumption:</b>	8w/m	<b>Light color:</b>	day light 5000K
<b>Power supply:</b>	current stable	<b>Usage:</b>	profile with groove 24x24mm
<b>Operation voltage:</b>	24VDC	<b>Light:</b>	120lm/w/m
<b>Min. bending radius:</b>	<40mm		

## INSTALLATION MANUAL

<https://youtu.be/u40tM5v7asU>

## PRODUCT

LED railing is modern way to integrate light into architecture, led lines enhance design of area. There is many options to configure light per customer request.

## SYSTEM

Focused on most common railing system in D42.4/40x40mm dimension. Available is whole range of accessories, which help you create your idea.

## DESIGN

Lighted railing offer you two main functions, decorative led line and functional light along whole handrail and walkway and meets the requirements of IP40/\*IP65.

Our LED handrail solution offer modified modular stainless steel railing system with diameter D42.4/40x40mm with accessories in brush or polish surface. Specially clean design for architects and designers to offer modern style in interior or exterior area. Railing provide smooth and consistent light along whole profile, without visible light spots. We adapt to your desired proposal.